

Quick Start Guide

Mechanical Electric Range

BEFORE YOU START

Remove the exterior and interior packaging. Remove the protective film on steel and aluminum parts. Check that all of the parts listed below are included with the unit.

- Oven Vent x 1 (Oven Vent with 2 screws) Also called Backsplash
- Oven Racks x 2
- Rotisserie x 1
- Anti-tip Bracket x 2 with 6 expansion screws
- Bottom Cover x 1
- Oven Drip Pan x1
- User Manual x 1
- Installation Guide x 1
- Quick Start Guide x 1

INSTALLATION

■ Electric cord is sold separately and is not included. Please check with your retailer for the correct electrical cord to use and to arrange for installation if you desire this additional service.

■ You must use a You need to buy an extra 3-conductor or 4-conductor UL listed range cord rated at 40 amps, 8 AWG with 120/240VAC electrical system. The common 110V electrical system is Not work for Lanbo electric range.

The oven vent (backsplash) releases hot air and moisture from the oven, and should not be blocked or covered. Blocking or covering the oven vent will cause poor air circulation, affecting cooking and cleaning results. Do not




set plastics, paper or other items that could melt or burn near the oven vent.

- When connect with the power, the heat elimination fan located in the upper back of the unit will start to work for self-inspection.
- Please follow the "Installation Guide" or "User Manual Page".

SURFACE OPERATION

The control knobs have a variable of power output from low to high with a number of positions. The range of heat is increased by turning the knobs to thicker dotted lines, decreased by turning the knobs to thinner dotted lines around knobs.




• To switch on, always lightly press the control knobs inwards then rotate.

OVEN OPERATION

Email: service@lanboappliances.com

You must set well the **Cooking mode knob**, the **Oven Temperature knob** and **the Timer knob** at the same time, then the oven can start work. Turn all the knobs to OFF if cooking finished.

For more detail operation instruction, please refer to "User Manual".

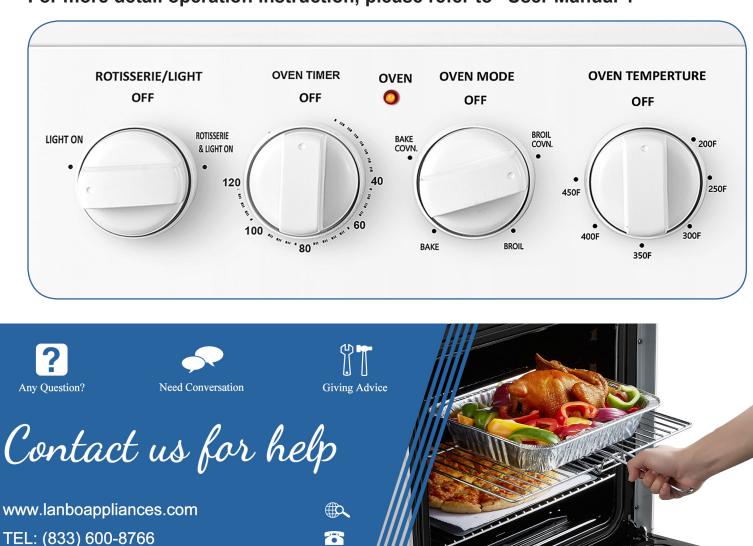

 \succ